



|      |             |            |
|------|-------------|------------|
| REV. | DESCRIPTION | DATE       |
| A    |             | 2022-08-09 |
| B    |             |            |

Cable Length

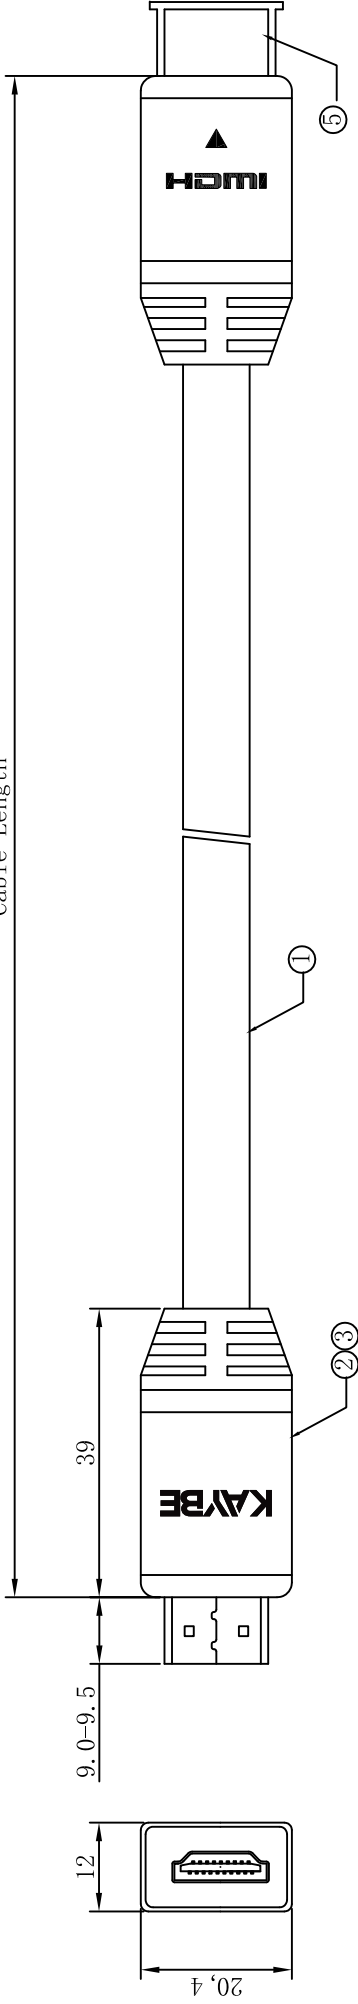

Cable Specifications:

- PVC Jacket: Black 110P PVC OD  $\varnothing 8.0 \pm 0.2$ mm
- Braid: 6/16/0.12AM
- PE Wire: 28AWG
- AL Foil
- AL Foil
- FM-PE Wire: 26AWG
- Drain Wire: 28AWG

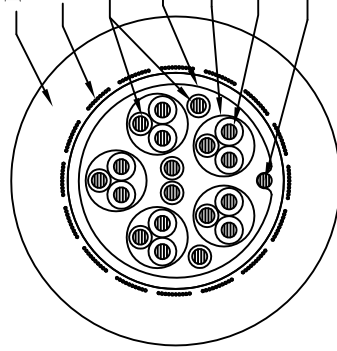


- Test standard:
- 100% pass open circuit, short circuit, dislocation test.
  - 0n-resistance: 10  $\Omega$  Max
  - Insulation resistance: 5M  $\Omega$  Min/DC200V/10ms
  - 100% pass 4K TV test

| PART NO. | LENGTH            |
|----------|-------------------|
| 1        | 15000 $\pm$ 100mm |
|          |                   |
|          |                   |

| ITEM NUMBER | TITLE              | DRAWER   | Ming |
|-------------|--------------------|----------|------|
|             | HDMI 2.0V 26-28AWG | CHECKED  |      |
|             |                    | APPROVED |      |
|             |                    |          |      |
|             |                    |          |      |

| NO. | BOM LIST  | SCALE | UNIT |
|-----|---|-------|------|
| 1   | HDMI 2.0V 26-28AWG OD: 8.0 (26#Cu*IP+28#Cu)*5+28#Cu*4C+28#Cu+96AM | A     | mm   |
| 2   | Blue Aluminum shell   |       |      |
| 3   | Inner Molding: Transparent PE                                     |       |      |
| 4   | HDMI 20 Pin Gold-plated plug                                      |       |      |
| 5   | Dust cap  |       |      |
|     |   |       |      |
|     |   |       |      |


**KAYBE**  
 Right transmission for the future