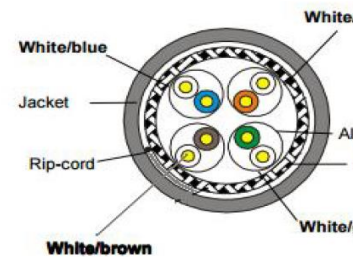


DESCRIPTION:-
KAYBE CAT7 S/FTP - 10G GRAND SERIES
PART NO: GRAND CAT710GSFTP

CONSTRUCTION DATA SHEET

OPERATING TEMPERATURE		-15°C TO 70°C
DESCRIPTION		CAT.7 SFTP LSZH SHEATH CABLE
CONDUCTOR	COND.MATERIAL	SOLID BARE COPPER
	NO OF STRANDS	1 Nos
	CONDUCTOR (MM)	23AWG
INSUALTION	MATERIAL	HDPE (High Density Polyethylene)
	THICKNESS (MM)	0.30 mm (Nominal)
	DIAMETER (MM)	1.42 ± 0.10 mm
PAIR TWISTING	# PAIR SEQUENCE	Pair - 1 White-Blue/Blue
		Pair - 2 White-Orange/Orange
		Pair - 3 White-Green/Green
		Pair - 4 White-Brown/Brown
LAYING STAGE	4 PAIR LAID UP	All of the 4pair twisted together With Seperator i.e. (4/1) Cross Filler
	RIP CORD	Available
SHIELDING	POLYSTER TAPE	100% Coverage
	AL-MYLAR TAPE	100% Coverage
	BRADIING	60% Coverage
	DRAIN WIRE	1/0.400± 0.008 ATC
OUTER SHEATH	MATERIAL	LSZH (LOW SMOKE ZERO HALOGEN)
	THICKNESS (MM)	0.60 mm (Nominal)
	DIAMETER (MM)	8.20MM +/- 0.5
	COLOUR	GREY OR YELLOW


ELECTRICAL PARAMETER

CONDUCTOR RESISTANCE AT 20°C	93.80 Ω/Km (Maximum)
RESISTANCE DC UNBALANCE	5% (Maximum)
INSULATION RESISTANCE	>500.0 MΩ/KM AT 500 VDC
DIELECTRIC STRENGTH	1.0 KV AC for 1 Minute (Withstood)
SPARK TEST	1.5 KV AC for 0.15 Seconds (Withstood)
CAPACITANCE TO 1KHz (Approx)	5.6nF/100m

MECHANICAL PERFORMANCE
INSULATION
PVC JACKET

INSULATION & SHEATH	TENSILE STRENGTH	13.79 N/mm (Minimum)2	10.00 N/mm2 (Minimum)
	ELONGATION	300% (Minimum)	150% (Minimum)
HOT DEFORMATION TEST (PVC Jacketing)		50% Maximum (80 ± 2 C for 4h)	
HEAT SHOCK TEST (PVC Jacketing)		150 ± 2 C X 1 hrs (No Cracks)	
COLD BEND TEST (PVC Jacketing)		(-15 ± 2 C for 2-3 hrs (No Cracks)	
BENDING RADIUS TEST		10 Times of Overall Dia (No Cracks)	

PACKING STANDARD

PACKING STANDARD	305 METERS / 1000FT
------------------	---------------------

Note: -

- 1.All Materials , used in product , are RoHS standard compliant
2. Most advnced grade of latest Sheath is used

KAYBE is a brand registered in middle east and gulf with dealing in Cables, Networking & Satellite Telecommunications Products since 1987. Our Cables include Lan Cables, Telecommunication, Coaxial Cable, Alarm cables, Lift cable

DESCRIPTION:-
KAYBE GRAND CAT.7 S/FTP CABLE, LSZH SHEATH
PART no: GRAND CAT710GSFTP
HIGH FREQUENCY ELECTRICAL PARAMETERS

FREEQ (MHz)	INS LOSS (dB/100m) Max.	NEXT Pair to Pair (dB/100m) Min.	NEXT Power Sum (dB/100m) Min.	ELFEXT Pair to Pair (dB/100m) Min.	ELFEXT Power Sum (dB/100m) Min.	Return Loss (dB/100m)
1	2.3	78.0	78.0	78.0	75.0	20.00
4	3.8	78.0	78.0	78.0	75.0	23.00
8	5.3	78.0	78.0	77.2	74.2	24.50
10	5.9	78.0	78.0	75.3	72.3	25.00
16	7.5	78.0	78.0	71.2	68.2	25.00
20	8.4	78.0	78.0	69.3	66.3	25.00
25	9.4	78.0	78.0	67.3	64.3	24.30
31.25	10.5	75.5	72.5	65.4	62.4	23.60
62.5	15.0	72.4	69.4	59.4	56.4	21.50
100	19.1	67.9	64.9	55.3	52.3	20.10
250	31.1	66.4	63.4	47.3	44.3	17.30
300	34.3	65.2	62.2	45.8	42.8	17.30
400	40.1	63.4	60.4	43.3	40.3	17.30
500	45.3	61.9	58.9	41.3	38.3	17.30
600	50.1	60.7	57.7	39.7	36.7	17.30

Note: -

- 1.All Materials , used in product , are RoHS standard compliant
2. The Cable meets international Fluke Pass Standard & LSZH

Packaging:


Compatible Products for CAT.7 SOLUTIONS

- KAYBE CAT 6A STP - Tool less Keystone Jack
- KAYBE CAT 6A STP - Rj45 Connectors 50u
- KAYBE CAT 7 & 6A SFTP Patch Cords
- KAYBE CAT 6A Patch Panel - STP 24port & 48port